



• 4.9 JUNCTIONS IN DRAINS

Before the adoption of AS/NZS 3500.2:2021, where a 45° junction was to be used to connect a branch drain to a main drain of the same size, the entry level of the branch drain could be installed at grade.

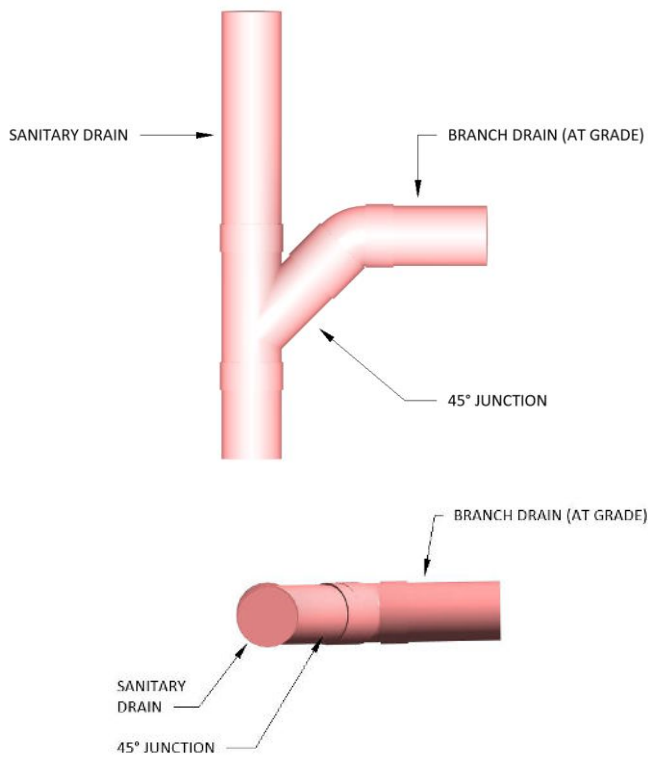

After the adoption of AS/NZS 3500.2:2021, where a 45° junction is to be used to make the connection of a 100Ø drain to another 100Ø drain, the entry level of the branch drain shall be elevated at an incline of not less than 15° above the horizontal

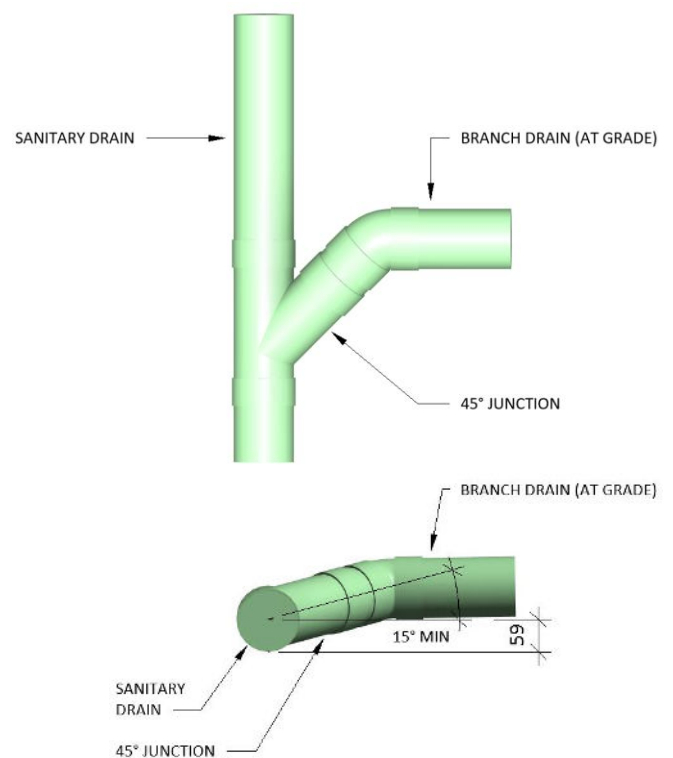

What does this mean?

Property sewer connection depths need to be reviewed at the early stages of the project.

Consideration of ceiling space is a must during the design phase.

Like all design challenges, there will be a solution for your project.

Contact us now to discuss your spatial requirements.

Be smart...